SMART KING PRO

Main Feature

Build-in Automatic Voltage Regulator(AVR)
Attached with AVR stabilize fluctuate voltage problem

Simple & Clear LCD display
Clear & easy reading LCD indicator

Auto Self-diagnose and alarm warning
Self-test diagnose and emergency alarm warning

High quality pure sine wave output
Pure sine wave safety output for load

Power saving design prolongs model usage age
Green mode energy saving design

Power protection on critical device
Surge, short circuit and overload protection to ensure power safety

Battery easy-swappable replacement design
Simple and easy battery replacement process

UPSMON PRO and APP
Instant UPS status is available to monitor through remote control system



Standard Outlet

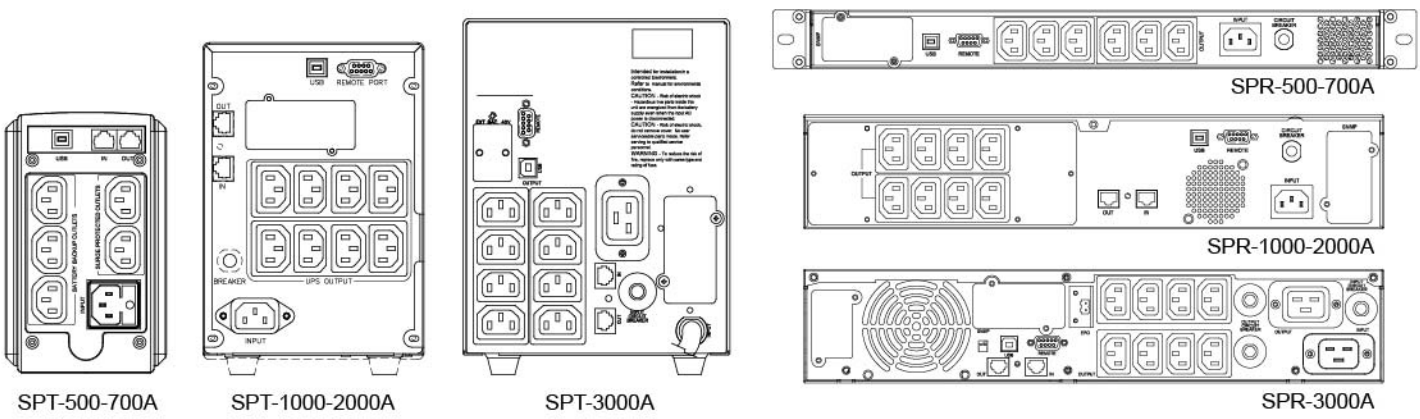

POWERCOM www.upspowercom.com

Line Interactive UPS

Specification

Model	SPT-500A SPR-500A	SPT-700A SPR-700A	SPT-1000A SPR-1000A	SPT-1500A SPR-1500A	SPT-2000A SPR-2000A	SPT-3000A SPR-3000A
Configuration						
Capacity (VA)	500 VA	700 VA	1000 VA	1500 VA	2000 VA	3000 VA
Capacity (Watts)	400 W	560 W	800 W	1200 W	1600 W	2400 W
Form	Tower Type : SPT model					
	Rack and Tower Type : SPR model					
Input						
Voltage	100 / 110 / 120 VAC or 220 / 230 / 240 VAC					220/230/240 VAC
Input Voltage Range	75 - 150 or 165 - 300 VAC					165 - 300 VAC
Input Frequency Range	50 Hz / 60 Hz ±10% (Auto Sensing)					
Output						
Waveform	Pure Sine Wave					
Voltage	100 / 110 / 120 VAC or 220 / 230 / 240 VAC					220/230/240 VAC
Frequency	50 Hz / 60 Hz ±0.5%					
Transfer Time	2-4 ms (Typical)					
Protection						
Full Protection	Overload, Surge, Short Circuit					
Tele Communication	RJ11 / RJ45 (Except SPR-500A/700A)					
Battery						
Type Quantity (Tower)	12V 7.2Ah x1	12V 9Ah x1	12V 7Ah x2	12V 7.2Ah x2	12V 9Ah x2	12V 7Ah x4
Type Quantity (Rack)	6V 7Ah x2	6V 9Ah x2	12V 7Ah x2	12V 7.2Ah x2	12V 9Ah x2	12V 7Ah x4
Sealed, Maintenance Free	Yes					
Typical Recharge Time	3-4 hr to 90%					
Management & Communication						
Indicator (Tower)	LED Panel		LCD Panel			
Indicator (Rack)	LCD Panel		LCD Panel (Auto rotation)			
Communication Port (Tower)	USB B type		USB B type, RS232 & SNMP SLOT			
Communication Port (Rack)	USB B type, RS232 & SNMP SLOT					
Physical						
SPT Dimensions (WxDxH)(mm)	102 x 326 x 165		140 x 380 x 210			170 x 450 x 226
SPT Weight (kgs)	6.2	6.8	14	15	17.5	25.4
SPT Shipping Dimensions (mm)	196 x 410 x 263		258 x 487 x 326			298 x 356 x 553
SPT Shipping Weight (kgs)	7.2	7.8	15.4	16.4	18.9	28.2
SPR Dimensions (WxDxH)(mm)	428 x 335 x 44		428 x 431 x 84			428 x 562 x 84
SPR Weight (kgs)	8.9	9.1	14.4	16.7	18.8	26.5
SPR Shipping Dimensions (mm)	563 x 473 x 168		577 x 590 x 211			577 x 720 x 211
SPR Shipping Weight (kgs)	10.9	11.1	18.2	20.4	22.6	30.5
Alarm						
Overload / Fault	Continuous Beeping					
Battery Mode	Beep every 4 seconds					
Low Battery	Beep every 1 second					
Environment						
Operating Humidity	0-90 % RH at 0-40°C (Non-condensing)					
Audible Noise	Less than 40 dB					

* Specifications are subject to change without further notice.

* Specifications are for reference, please refer to information based on real product.

20210831