


TR-MACS2 TCP/IP Two Door Access Control Board




- 100M TCP/IP communication mode
- 42,000 user data
- 200,000 event record storage
- 1 set of 7A door lock relay output

Specifications

Model	TR-MACS2
Record Capacity	200,000 (Can be extended)
Card Capacity	42,000 (Can be extended)
Communication Type	TCP/IP (10/100M)
Communication Distance	TCP/IP (100M)
Door Control	2
Readers	4
Exit Switch	2
Door Sensor Interface	2
Relay	2
Alarm Extension	4 enter and 4 exit (fire alarm, bandit alarm, burglar alarm, gas alarm)
Dimension	157*130*20mm
Operating Temperature	-40℃ - 75℃
Operating Humidity	10% to 90% RH
Reading Protocol	Wiegand 26 \ Wiegand 34 \ Wiegand 66
Certifications	CE,FCC,ISO9001,ISO14001
Working voltage	DC9V - 14V
Working current	<350mA

Wiring Diagram

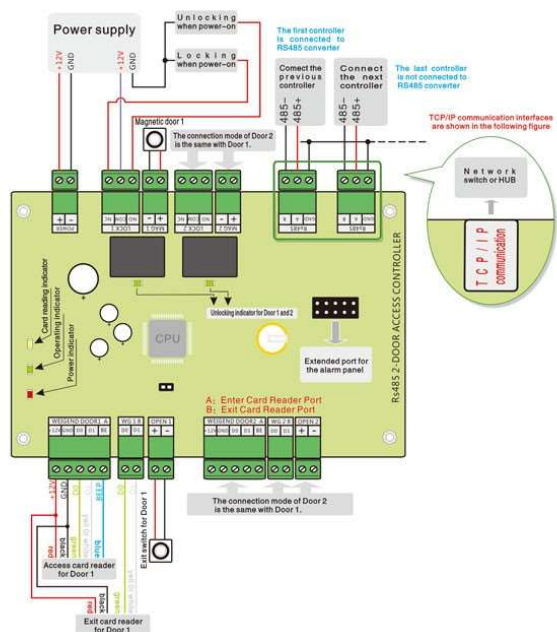

Access Control Systems using Serial Controllers

